


### Drive-on ramp with hydraulic jack Q-TECH (car / ATV / UTV)

#### Introduction:

The main features of this ramp with a jack are its robust construction, wide range of handling, and user-friendliness. It is ideal for car workshops, motorcycle garages, garages in general – anywhere access to the undercarriage of a vehicle (e.g., a car) is required.

---

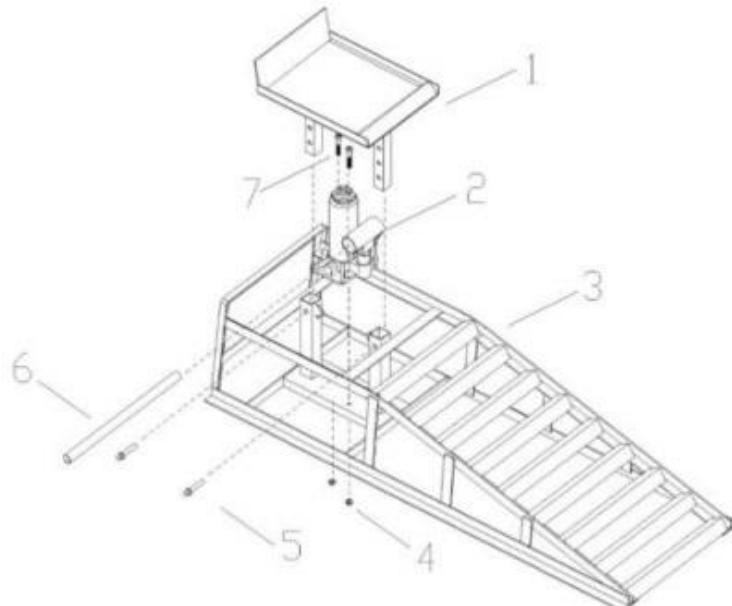

#### Construction:

1. Drive-on platform
2. Hydraulic jack
3. Ramp
4. Nuts
5. Safety pin
6. Handle
7. Screw

---

#### Main Specifications:

1. Maximum load capacity: 1500 kg
2. Minimum height: 240 mm
3. Maximum height: 350 mm
4. Net weight: 18 kg
5. Dimensions: 930 x 310 x 270 mm

---

**Warnings:**

- Carefully read all instructions and warnings in the documentation provided with the device before first use.
- Always perform a visual inspection before use. Especially check for hydraulic system tightness, and for any loose or missing parts.
- Never leave the device operating unattended.
- Failure to follow these warnings may result in property damage or personal injury.
- Each person operating the device must be properly trained.
- Observe the maximum jack load capacity as marked on the jack (1.5 t).
- Do not use the jack for any purposes other than those for which it is intended.
- Do not place any additional items (such as mats, extensions, etc.) between the jack and the lifted object.
- Do not leave the load raised longer than necessary – extended elevation without supervision is not recommended. If the load must remain elevated for longer periods, use additional mechanical supports.
- Always place the jack on a firm and level surface.
- Position the load on the jack evenly and stably, considering its center of gravity.
- Never tamper with or modify the device.
- When working under the vehicle, always make sure it is properly secured against unintended movement.